

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
E		调整电气性能描述&更新图框	2021.10.16	XUETAOGUO

NOTE:


- MATERIAL: SEE BOM
- FINISH: TERMINAL: SEE PART NO;
- SPEC. PLS. REFER TO EI003
 - DIM. MARKED \otimes SHOULD BE MEASURED BY FAI;
 - DIM. MARKED ∇ SHOULD BE CONTROLLED BY QC;
 - DIM. MARKED \square SHOULD BE MEASURED TERMPLY BY QC;
 - DIM. MARKED \square SHOULD BE ANALYSED TERMPLY BY QC;

8.ORDERING INFORMATION:

WB0813 H - XX X X X X
 H: HOUSING WITH EAR
 XX: PIN NO.
 X: PLATING SPEC
 X: PACKING
 X: B:BLACK
 X: N:NATURAL
 X: S:BLUE
 X: S:MATT Sn
 X: G:GOLD FLASH
 X: T:GOLD 3U" ON CONTACT AREA



WITHOUT "H" : WITH HALOGEN
 WITH "H" : HALOGEN FREE

CKT.	Dim A	Dim B	Dim C	Dim D
2	0.80	1.78	2.40	3.20
3	1.60	2.58	3.20	4.00
4	2.40	3.38	4.00	4.80
5	3.20	4.18	4.80	5.60
6	4.00	4.98	5.60	6.40
7	4.80	5.78	6.40	7.20
8	5.60	6.58	7.20	8.00
9	6.40	7.38	8.00	8.80
10	7.20	8.18	8.80	9.60
11	8.00	8.98	9.60	10.40
12	8.80	9.78	10.40	11.20
13	9.60	10.58	11.20	12.00
14	10.40	11.38	12.00	12.80
15	11.20	12.18	12.80	13.60
16	12.00	12.98	13.60	14.40
17	12.80	13.78	14.40	15.20
18	13.60	14.58	15.20	16.00
19	14.40	15.38	16.00	16.80
20	15.20	16.18	16.80	17.60
21	16.00	16.98	17.60	18.40
22	16.80	17.78	18.40	19.20
23	17.60	18.58	19.20	20.00
24	18.40	19.38	20.00	20.80

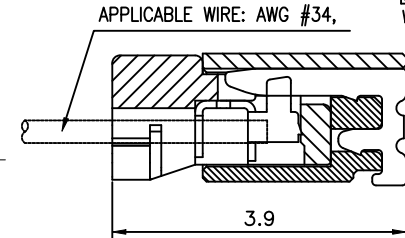


MATED CONDITION



APPLICABLE WIRE: AWG #34,

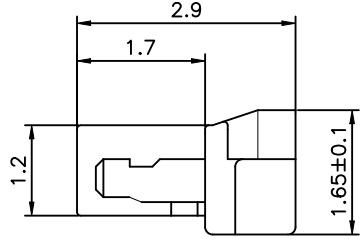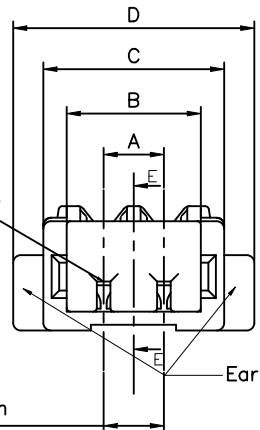

02-11 CONTACTS





12-24 CONTACTS

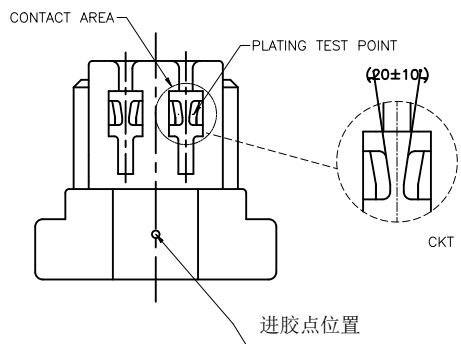

E VIEW

C-WB0813(H)-XXXXXE

C-WB0813(H)-XXXXX



NO.	DESCRIPTION	Q'TY.	MATERIAL
2	TERMINAL 1	~	COPPER ALLOY
1	HOUSING	1	THERMALPLASTIC (UL94V-0) NATURAL

一般公差 TOLERANCES X: ±0.5 XX: ±0.15 X: ±0.25 XXX: ±0.1 ANGLES ±2°		希尔盛精密电子(昆山)有限公司	
檢驗尺寸標示 SYMBOLS \odot INDICATE CLASSIFICATION DIMENSION \ominus MARK IS CRITICAL DIM. \square MARK IS MAJOR DIM.	品名 (TITLE) 0.8 mm Pitch WTB CONN	製圖 (DR) XUETAOGUO	審核 (CHKD) LEO-HE
表面處理 (FINISH)	圖號 (DWG NO.) C-WB0813H-XXXXXX	核准 (APPD) LEO-HE	張數 (SHEET) 1/1
比例 (SCALE) 5:1	單位 (UNITS) mm	張數 (SHEET) 1/1	比例 (SCALE) 5:1